

TERMA Integration roundabout



Integration • Universal application • **Rehabilitation** • Self efficiency



Code: WDKAR01

Purpose of the device:

Integration Roundabout is dedicated to be installed on the playgrounds, parks and private gardens to provide accessible recreation area for the wheelchair users together with the non-disabled users.

Materials:

Framing: black steel profiles with epoxy primer + powder coating

Platform: riffled steel plate

Backrest: PU, HDPE

Substructure: concrete minimum B-15 class

Dimensions:

External dimensions: diameter 2092 [mm]

Height: 1000 [mm]

Substructure depth: 650 [mm]

Weight: 400 kg

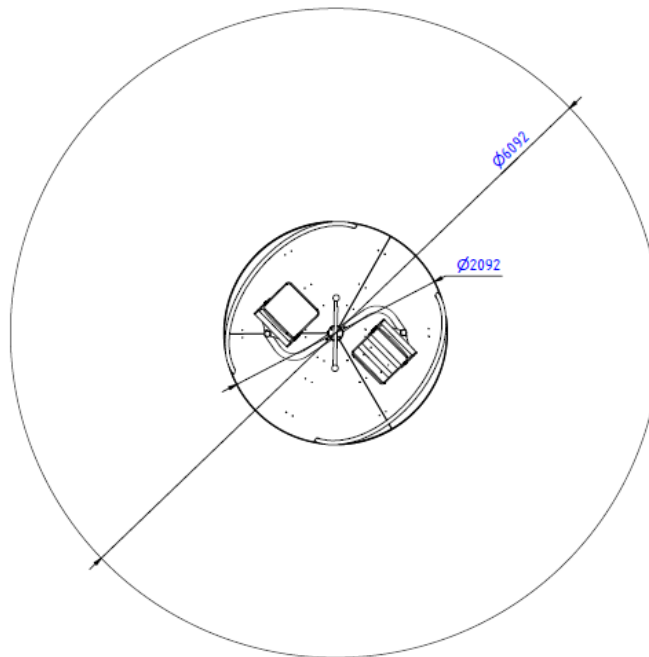


Fig. Radius of the Integration Roundabout together with the safety area.

Safety note:

TERMA integration roundabout complies with EN 1176-5 norm.

User information:

1 wheelchair user + 1 non-disabled user
2 wheelchair users
2 non-disabled users
Maximum load: 300 kg

Additional dimensions:

Free fall height: 400 [mm]
Safety zone: radius 2000 [mm] around the edge of the platform
Area of the functional zone: 29.21 m ²



Installation:

Anchoring to the ground. Amortization layer is needed. Homogeneous surface is necessary. Make sure to provide appropriate surface for the wheelchair users!

Manufacturer:



TERMA Sp. z o.o.
Czaple 100, 80-298 Gdańsk
M: +48 / 609 900 451
T: +48 58 / 694 06 02
produktymedyczne@termagroup.pl
www.termamed.pl
www.facebook.com/termamed
www.facebook.com/termamed