

## Contact us

### ABB Oy



Muottitie 2A 65320  
Vaasa, Finland  
abb.com/lowvoltage



© Copyright 2025 ABB. All rights reserved.  
Specifications subject to change without notice.


34OT\_G1-34 rev.A/ 1SCC301148M0201 # 28.02.2025

## OT Plus OT16...63G1-

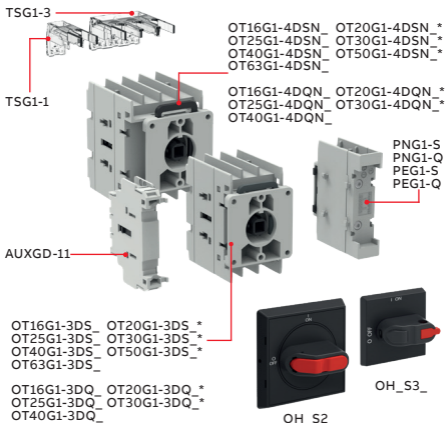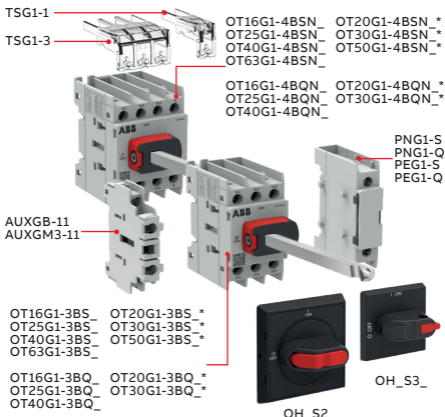


\*cUL only


## Mounting

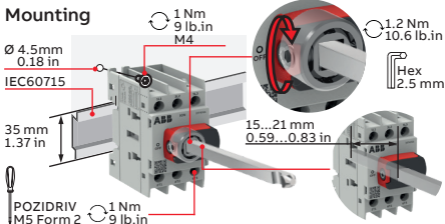


## Quick spring terminal

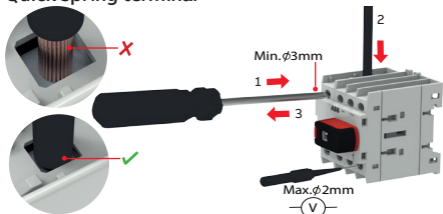


## Padlock

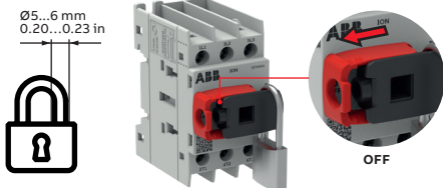

## Adjustable neutral pole timing

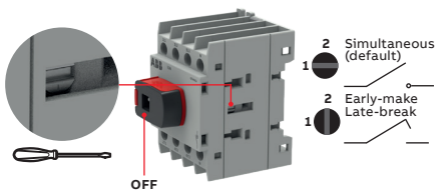

## Clearances per UL60947-4-1



Wire type (Cu only)	1 Wire (mm <sup>2</sup> )	2 Wire (mm <sup>2</sup> )	Quick spring terminal 1Wire (mm <sup>2</sup> )	Stripping length	Tightening torque
Class 5-Flexible	1.5-16	1.5-6	1.5-10		 1 Nm 9 lb.in
Class 2-Stranded	1.5-16	1.5-6	1.5-10		
Class 6-Very flexible with ferrule	0.75-4	0.75-4	1.5-4		
Class 1-Solid	0.75-6	0.75-6	1.5-4		
UL - Stranded	16-6	16-10	16-8		
UL - Solid	18-10	18-10	18-10		



Warning! Hazardous voltage! Installation by person with electrotechnical expertise only.

