

## Contact us

### ABB Oy

Muottitie 2A 65320

Vaasa, Finland


abb.com/lowvoltage




© Copyright 2025 ABB. All rights reserved.  
Specifications subject to change without notice.

34OT\_G1-68 rev. A / 1SCC301151M0201# 06.03.2025

## OT Plus OT16...OT63G1- & OTC16...63G1-

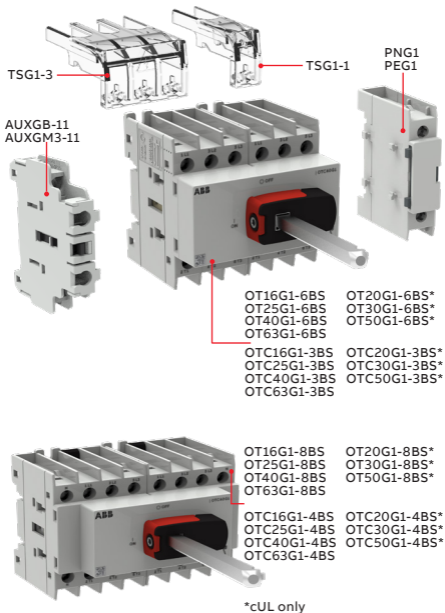

## Mounting

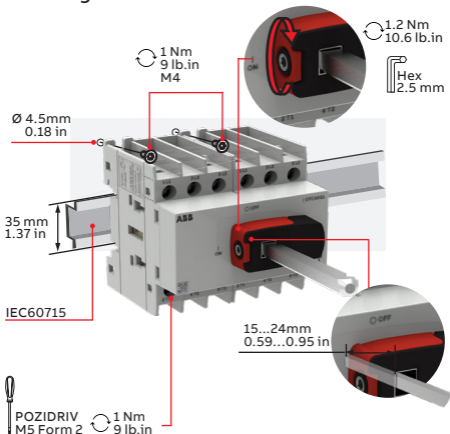


## Padlock

Ø5... 6 mm  
0.20...0.23in



OFF

## Adjustable neutral pole timing

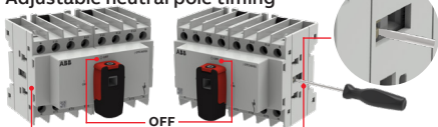

2 Simultaneous (default)

1




2 Early-make Late-break

1



## Clearances per UL60947-4-1



Wire type (Cu only)	1 Wire (mm <sup>2</sup> )	2 Wire (mm <sup>2</sup> )	Stripping length	Tightening torque
Class 5-Flexible	1.5-16	1.5-6	9-10 mm 0.35-0.39 in	POZIDRIV M5 Form 2 1 Nm 9 lb.in 
Class 2-Stranded	1.5-16	1.5-6		
Class 6-Very flexible with ferrule	0.75-4	0.75-4		
Class 1-Solid	0.75-6	0.75-6		
UL - Stranded	16-6	16-10		
UL Solid	18-10	18-10		

## OTC16...63G1

Switch I	Switch II	Switch III	Switch IV



Warning! Hazardous voltage! Installation by person with electrotechnical expertise only.

