



EBOX PILL - SWITCH ACTUATOR

PEP ecopassport®Product Environmental Profile





Product Environmental Profile - PEP Ecopassport.
Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

ORGANIZATION		CONTACT INFORMATION	CONTACT INFORMATION					
Busch-Jaeger Elektro GmbH		pia.denninghoff@de.abb.com						
DDRESS			WEBSITE	WEBSITE				
Freisenbergstraße 2, 5	8513 Lüdensc	cheid, Germany	https://www.busch-jaeger.de/e	https://www.busch-jaeger.de/en/online-catalogue/detail/2CKA006710				
STATUS		SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE		
Approved		Public	ABBG-00494-V01.01-EN	1	en	1/12		



ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.


Φ**!**!!

General Information

Reference product	62811 U-WL Switch Actuator 1gang, FM, WL (2CKA006710A0032)
Description of the product	The eBox Pills are wireless pills for Free@Home residential applications. They are installed in a flush mounted box (VDE) or ceiling box, with gray plastic housing and a printed circuit board. There is a terminal for connection to 230V for power supply and wireless connectivity to the Free@Home system. The conductors are connected with push-in terminals. The switch actuators are designed to switch lights and other loads.
Functional unit	Switching lights and other loads, with rated current 13A and rated voltage 230V, with a degree of protection IP20 and for the reference service life of the product of 10 years.
Other products covered	62811 U-WL-500 Switch Actuator 1gang, FM, WL (2CKA006710A0034); 62811/10 U-WL Switch Actuator 1gang, FM, WL, x10 (2CKA006710A0033); 62811/10 U-WL-500 Switch Actuator 1gang, FM, WL, x10 (2CKA006710A0035)

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00494-V01.01-EN	1	en	2/12





Total weight of Reference product with packaging

177,94

g

Plastics as % o	of weight	Metals as % of	Metals as % of weight		fweight
Name and CAS number	Weight%	Name and CAS number	Weight%	Name and CAS number	Weight%
PBT 7% glass- fibre	56,2	_	-	РСВА	10,6
Polyester	1,2	_	x	Paper	32,0

All products in this range are in conformity with the provisions of RoHS directive 2011/65/EU, covering 2015/863(EU), REACH regulation No 1907/2006 and national legislation.

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00494-V01.01-EN	1	en	3/12

Additional Environmental Information

Manufacturing	The product is produced at and delivered from the Fideltronik manufacturing site in Krakow (Poland). No recycled material content is assumed. The default scenario from the PCR is assumed for intracontinental transport of the components. The manufacturing waste for all materials is included. Electricity is modelled using the Polish residual mix. For transport of waste from the manufacturing site to the treatment facility, the default distance of 100 km by truck is used, in line with the PSR. Specific one-year data from 2023 on manufacturing site level was collected and allocated to the products by economic allocation, following the requirements of ISO 14044.
Distribution	A BJE specific transport scenario is used.
Installation	Installation is done manually with negligible use of energy or other auxiliary materials. Treatment of packaging waste is included in this stage, assuming the European nd International end-of-life scenario's mentioned in chapter 5.1.5.2.1 of the PSR.
Use	The reference product is on stand-by for 100% of the time with an energy consumption of 0,3W. With a reference lifetime of 10 years and 8760 hours per year, this results in a power consumption of 26,28 kWh over the lifetime.
End of life	The standard scenario set in the PCR is considered with parameters listed in Appendix D and a transport distance of 1000 km.
Benefits and loads beyond the system boundaries	Product raw materials were not included here, due to a material recovery rate of 0. For the product packaging, the default (European) end-of-life data from chapter 3.1.5.2.1 of the PSR is used to determine the recycling rates. According to that, cardboard and paper have a recovery rate of 82%, and plastic a recovery rate of 40% which are also included in this stage.

	STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved Public ABBG-00494-V01.01-EN 1 en 4/12	Approved	Public	ABBG-00494-V01.01-EN	1	en	4/12





Environmental Impacts

Reference lifetime	10 years
Product category	Other equipment
Installation elements	Not applicable
Use scenario	Active product
Geographical representativeness	Europe + Australia
Technological representativeness	Materials and process data are specific for the production of the eBox Pills.
Software and database used	SimaPro version 10.1.0.5, Ecoinvent version 3.10
Energy model used	
Energy model used Manufacturing	Electricity, medium voltage {PL} electricity, medium voltage, residual mix
Manufacturing	A market for electricity from all European countries is included in the datase used to model the recycling of cardboard ("Electricity, medium voltage {DE} market group

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00494-V01.01-EN	1	en	5/12

Common base of mandatory indicators



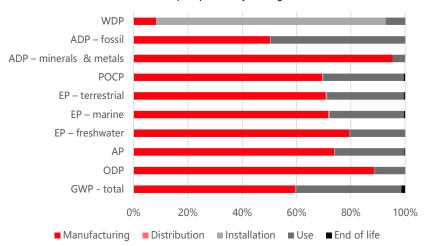

STATUS

Approved

SECURITY LEVEL

Public

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
GWP-total	kg CO ₂ eq.	2,01E+01	1,20E+01	1,31E-02	5,59E-02	7,80E+00	2,70E-01	-6,81E-0
GWP-fossil	kg CO ₂ eq.	2,00E+01	1,20E+01	1,31E-02	3,78E-02	7,64E+00	2,68E-01	-1,18E-0
GWP-biogenic	kg CO ₂ eq.	1,27E-01	-2,29E-02	4,70E-07	1,72E-02	1,30E-01	2,21E-03	5,03E-02
GWP-luluc	kg CO ₂ eq.	4,28E-02	9,09E-03	5,25E-06	9,06E-05	3,36E-02	1,54E-05	-1,82E-0
GWP-fossil = Glo GWP-biogenic = GWP-luluc = Glob	Global Warming	Potential b	iogenic	e change				
ODP	kg CFC-11 eq.	2,02E-06	1,79E-06	1,87E-10	1,10E-09	2,29E-07	1,13E-09	-1,36E-0
ODP = Depletion	potential of the	stratospheri	c ozone layer					
AP	H+ eq.	9,31E-02	6,88E-02	6,43E-05	2,22E-04	2,38E-02	2,14E-04	-6,56E-0
AP = Acidification	n potential, Accu	mulated Exc	ceedance					
EP-freshwater	kg P eq.	1.91E-03	1,52E-03	1,12E-07	3,92E-06	3,86E-04	6,11E-07	-6,27E-0
	5 1	,-		.,	0,022 00	0,000	0,112 07	0,272 0
EP-marine	kg N eq.	1,60E-02	1,15E-02	1,91E-05	6,69E-05	4,37E-03	6,79E-05	
	• .	1,60E-02 1,86E-01						-1,32E-0
EP-marine	kg N eq. mol N eq. Eutrophication pophication poter	1,86E-01 otential, fraction	1,15E-02 1,32E-01 ction of nutrients	1,91E-05 2,11E-04 reaching fresching marine	6,69E-05 6,32E-04 hwater end comp	4,37E-03 5,29E-02 eartment	6,79E-05	-1,32E-0
EP-marine EP-terrestrial EP-freshwater = EP-marine = Eutro	kg N eq. mol N eq. Eutrophication pophication poter	1,86E-01 otential, fraction	1,15E-02 1,32E-01 ction of nutrients	1,91E-05 2,11E-04 reaching fresching marine	6,69E-05 6,32E-04 hwater end comp	4,37E-03 5,29E-02 eartment	6,79E-05 7,18E-04	-1,32E-0 -1,42E-0
EP-marine EP-terrestrial EP-freshwater = E EP-marine = Eutr EP-terrestrial = E	kg N eq. mol N eq. Eutrophication pophication poter utrophication po kg NMVOC eq.	1,86E-01 otential, fraction tital, fraction tential, Accu	1,15E-02 1,32E-01 btion of nutrients n of nutrients rea umulated Exceed	1,91E-05 2,11E-04 reaching fresiching marine dance	6,69E-05 6,32E-04 hwater end comp end compartmen	4,37E-03 5,29E-02 eartment	6,79E-05 7,18E-04	-1,32E-0 -1,42E-0
EP-marine EP-terrestrial EP-freshwater = E EP-marine = Eutr EP-terrestrial = E	kg N eq. mol N eq. Eutrophication pophication poter utrophication po kg NMVOC eq.	1,86E-01 otential, fraction tital, fraction tential, Accu	1,15E-02 1,32E-01 btion of nutrients n of nutrients rea umulated Exceed	1,91E-05 2,11E-04 reaching fresiching marine dance	6,69E-05 6,32E-04 hwater end comp end compartmen	4,37E-03 5,29E-02 eartment	6,79E-05 7,18E-04	-1,32E-0 -1,42E-0 -4,25E-0
EP-marine EP-terrestrial EP-freshwater = E EP-marine = Eutr EP-terrestrial = E POCP POCP = Formation ADP-minerals	kg N eq. mol N eq. Eutrophication pophication poter utrophication poter eq. eq. on potential of tro	1,86E-01 otential, fraction tial, fraction tential, Accu 5,46E-02 opospheric of	1,15E-02 1,32E-01 ction of nutrients reaumulated Exceeding 3,79E-02	1,91E-05 2,11E-04 reaching fressching marine dance 7,76E-05	6,69E-05 6,32E-04 hwater end comp end compartmen 1,42E-04	4,37E-03 5,29E-02 partment t	6,79E-05 7,18E-04 2,85E-04 1,46E-07	-1,32E-0 -1,42E-0 -4,25E-0 -3,88E-0
EP-marine EP-terrestrial EP-freshwater = E EP-marine = Eutr EP-terrestrial = E POCP POCP = Formation ADP-minerals & metals	kg N eq. mol N eq. Eutrophication pophication poter utrophication poter eq. on potential of tro kg Sb eq. MJ metals = Abiotic	1,86E-01 otential, fraction tential, Accurate tential, Acc	1,15E-02 1,32E-01 btion of nutrients reaumulated Exceed 3,79E-02 DZONE 2,52E-03 8,05E+01 Detential for non-f	1,91E-05 2,11E-04 reaching fresiching marine dance 7,76E-05 3,32E-08 1,69E-02	6,69E-05 6,32E-04 hwater end comp end compartmen 1,42E-04 1,49E-07 2,92E-01	4,37E-03 5,29E-02 artment t	6,79E-05 7,18E-04 2,85E-04 1,46E-07	-1,32E-0 -1,42E-0 -4,25E-0 -3,88E-0

REGISTRATION NUMBER

ABBG-00494-V01.01-EN

REV.

LANG.

PAGE

6/12

Common base of mandatory indicators

Inventory flows indicator - Resource use indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
PERE	MJ	7,25E+01	1,07E+01	2,35E-03	4,12E-01	6,14E+01	1,30E-02	-1,55E-01
PERM	MJ	1,24E+00	1,24E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-1,01E+00
PERT	MJ	7,37E+01	1,19E+01	2,35E-03	4,12E-01	6,14E+01	1,30E-02	-1,17E+00
PENRE	MJ	1,52E+02	7,23E+01	1,69E-02	2,92E-01	7,90E+01	6,37E-02	-7,75E-01
PENRM	MJ	8,17E+00	8,17E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-6,53E-02
PENRT	MJ	1,60E+02	8,05E+01	1,69E-02	2,92E-01	7,90E+01	6,37E-02	-8,40E-01

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials

Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy resources

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m³	7,94E-01	1,80E-01	2,65E-05	4,81E-01	1,33E-01	2,65E-04	-1,67E-03

SM = Use of secondary material

RSF = Use of renewable secondary fuels

NRSF = Use of non-renewable secondary fuels

FW = Use of net fresh water

Inventory flows indicator - Waste category indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Hazardous waste disposed	kg	2,98E-02	1,09E-02	0,00E+00	0,00E+00	0,00E+00	1,89E-02	0,00E+00
Non- hazardous waste	kg	1,65E-01	5,18E-02	0,00E+00	1,28E-02	0,00E+00	1,00E-01	0,00E+00
Radioactive waste disposed	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00494-V01.01-EN	1	en	7/12

PERM = Use of renewable primary energy resources used as raw materials

PERT = Total Use of renewable primary energy resources

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total Use of non-renewable primary energy resources

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Components for re- use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	4,63E-02	0,00E+00	0,00E+00	4,63E-02	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Inventory flow indicator - other indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Biogenic carbon content of the product	kg of C	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content of the associated packaging	kg of C	0,00E+00	2,16E-02	0,00E+00	-2,16E-02	0,00E+00	0,00E+00	0,00E+00

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00494-V01.01-EN	1	en	8/12

Optional indicators

Environmental indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Total use of primary energy during the life cycle	MJ	2,33E+02	9,24E+01	1,93E-02	7,04E-01	1,40E+02	7,67E-02	-2,01E+00
Emissions of fine particles	incidence of diseases	5,25E-07	4,03E-07	1,21E-09	1,85E-09	1,16E-07	3,05E-09	-7,40E-09
lonizing radiation, human health	kBq U235 eq.	5,25E-07	2,98E-01	6,14E-05	3,32E-03	1,61E+00	3,28E-04	-4,80E-03
Ecotoxicity (fresh water)	CTUe	5,25E-07	1,71E+02	5,67E-02	8,57E-01	5,44E+01	2,57E+00	-9,84E-01
Human toxicity, car- cinogenic effects	CTUh	5,25E-07	1,85E-08	6,26E-11	1,14E-10	2,01E-08	3,56E-10	-3,30E-10
Human toxicity, non- carcinogenic effects	incidence of diseases	5,25E-07	2,64E-07	1,47E-10	2,47E-09	1,32E-07	1,87E-09	-1,52E-09
Impact related to land use/soil quality		5,25E-07	4,34E+01	1,75E-01	1,57E+00	5,58E+01	2,87E-01	-4,49E+00

Other indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
No Other indicators used								

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved F	Public	ABBG-00494-V01.01-EN	1	en	9/12

Extrapolation Factors

For other products than the Reference product covered by this PEP, the environmental impacts for each phase of the lifecycle are obtained by multiplying the values of the Reference product by the following coefficients:

* if the coefficient is "1", the impacts of the phase of the life cycle are assimilated to the Reference product, meaning that the impacts are unchanged in comparison to the Reference product

Product name	Manu- facturing	Distri- bution	Installation	Use	End of life	Benefit
Switch Actuator 1gang, FM, WL, x10 (2CKA006710A0033)	0,99	0,72	0,12	1,00	1,00	0,12
'ATUS	SECTIBITAL EVE		REGISTRATION NU	IMPED	DEV LANG	i. PAGE
AIUS	SECURITY LEVEL	_	KEGIOTKATION NU	NINDEK	REV. LANG	. PAGE

Environmental Impact Indicator Glossary

Impact indicators

Indicator	Description	Distri- bution
Global warming potential (GWP) - total	Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three subcategories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change	kg CO ₂ eq.
Ozone depletion (ODP)	Emissions to air that contribute to the destruction of the stratospheric ozone layer	kg CFC- 11 eq.
Acidification of soil and water (A)	Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides	H+ eq.
Eutrophication (E)	Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial.	kg P eq., kg N eq., mole N eq.
Photochemical ozone creation (POCP)	Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun.	kg NMVOC eq.
Depletion of abiotic resources – elements (ADPe)	Indicator of the depletion of natural non-fossil resources	kg Sb eq.
Depletion of abiotic resources – fossil fuels (ADPf)	The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste)	MJ (lower heating value)
Water Deprivation potential (WDP)	Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived.	m³ eq. depr.

Resource use indicators

Indicator	Description	Distri- bution
Total use of primary energy	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ (lower heating value)

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00494-V01.01-EN	1	en	11/12

Registration number	: ABBG-00494-V01.01-EN	Drafting Rules: Supplemented by:	PCR-ed4-EN-2021 09 PSR-0005-ed3.1-EN-			
Verifier accreditation number: VH08		Information and refe documents:	ence www.pep-ecopassport.org			
Date of issue:	05-2025	Validity period: 5 ye	ars			
Independent verifica	ation of the declaration and data, in c	compliance with ISO 14)25: 200 6			
Internal: 〇	External:					
The PCR review was	conducted by a panel of experts chaire	ed by Julie ORGELET (DD	emain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019 or NE E38-500 :2022 The components of the present PEP may not be compared with elements from any other program.						
Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"						

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00494-V01.01-EN	1	en	12/12