


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

RE22R1KMR

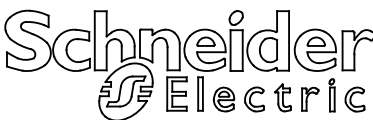

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Max. Switching Current: 8A
Max. Switching Voltage: 250 V
Max. Power Consumption: 3VA (AC), 2W (DC)
Input Signals: none
Function Available: K
Function Description: Delay on de-energization
Time Ranges: 0.05 s to 10 min
Type of Output: Relay
Contact Configuration: SPDT

Specification:

Description: Timer, 24-240 VAC/VDC Input, 8A SPDT Relay Output, De-energization Delay
Ambient Storage Temp.: -40 to +70 °C (-40 to +158 °F)
Ambient Operating Temp.: -20 to +60 °C (-4 to +140 °F)
Degree of Protection Term. Block: IP20
Degree of Protection Housing: IP40
Electrical Life @ Rated Load: 100,000 cycles
Mechanical Life @ Rated Load: 20,000,000 cycles
Dial Settings: Range = 1s to 10min, Time setting = 1 to 10
Mounting: 35 mm DIN Rail