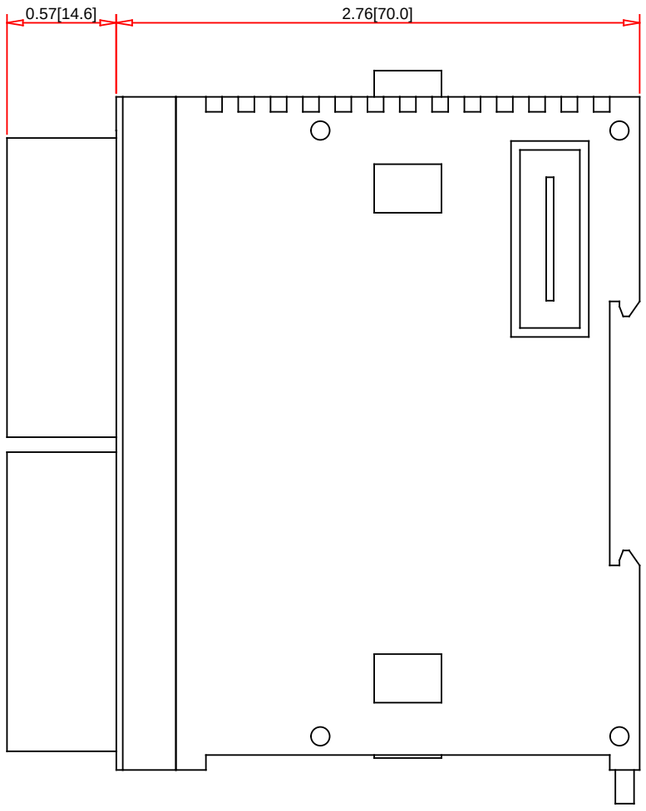

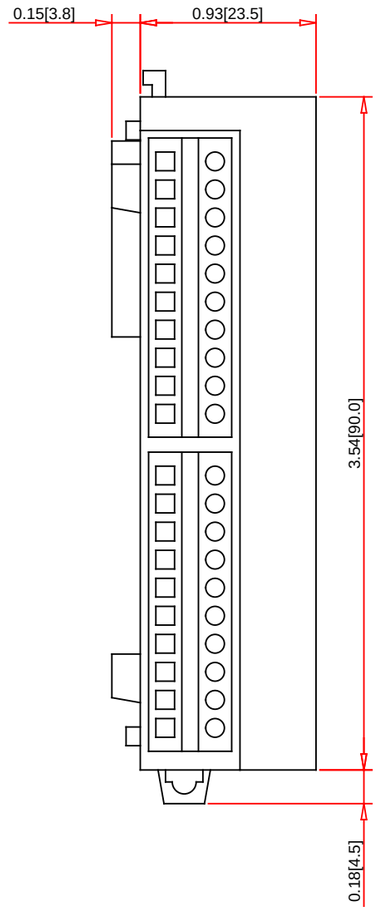

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

TM2AMM6HT

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Resolution:	12 bits or 11 bits + sign (4096 points) (INPUT), 12 bits (4096 points) (OUTPUT)
Input Acquisition Period:	64ms + 1 Controller Cycle Time
Output Transfer Time:	20ms + 1 Controller Cycle Time
Isolation Between Channels and Int. Logic:	1500V AC rms
Isolation Between Channels:	Non Isolated Between Channels, 800V AC rms (Channel and Sensor Supply)
Mounting:	35mm DIN Rail
RoHS:	Yes
Weight [kg]:	0.085

Specification:

Description:	
Selection:	Analog Mixed Expansion Module
Input Range:	0-10V, 4-20mA
Output Range:	0-10V, 4-20mA
Connection Type:	Removable Screw Terminal Block