Installation Quick Guide

O2085GB1

Esmi Fire

Esmi Impresia Wet Base

Safety Information

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction, installation, and operation of electrical equipment and has received safety training to recognize and avoid the hazards involved.

Esmi Impresia Wet Base

Esmi Impresia Wet Base (FFS06741029) is a spacer that is used with Esmi Impresia bases. The wet base is designed for wet surfaces.
Compatible with Esmi Impresia Standard Base (FFS06741018) and Esmi Impresia Standard Base High Profile (FFS06741028).

For more technical information visit www.se.com.

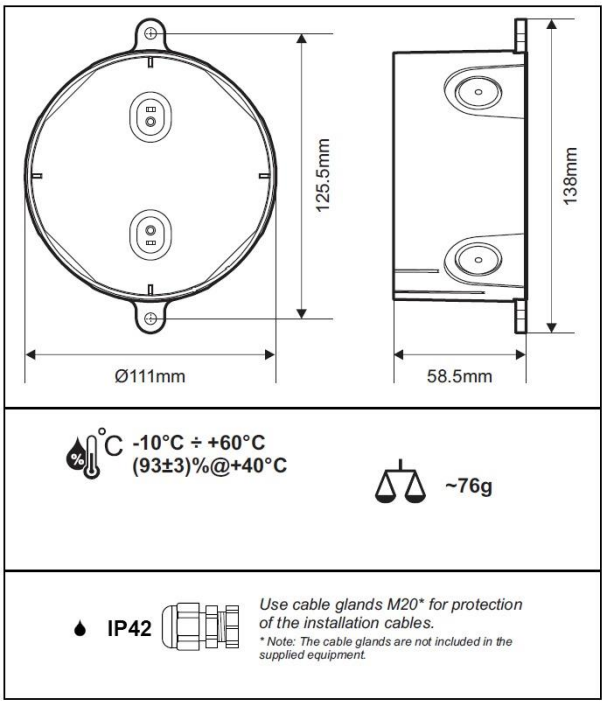

⚠ WARNING

COMPROMISED FUNCTIONALITY

- Make sure that the setup where the device is installed meets the device specifications.
- Use M20 cable glands with ingress protection code IP42.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

Technical Specifications

Max cable size for cable gland ..... Refer to cable gland specification
Operating temperature ..... -10 °C to +60 °C
Relative humidity resistance ..... (93 ± 3)% @ 40 °C

Installation

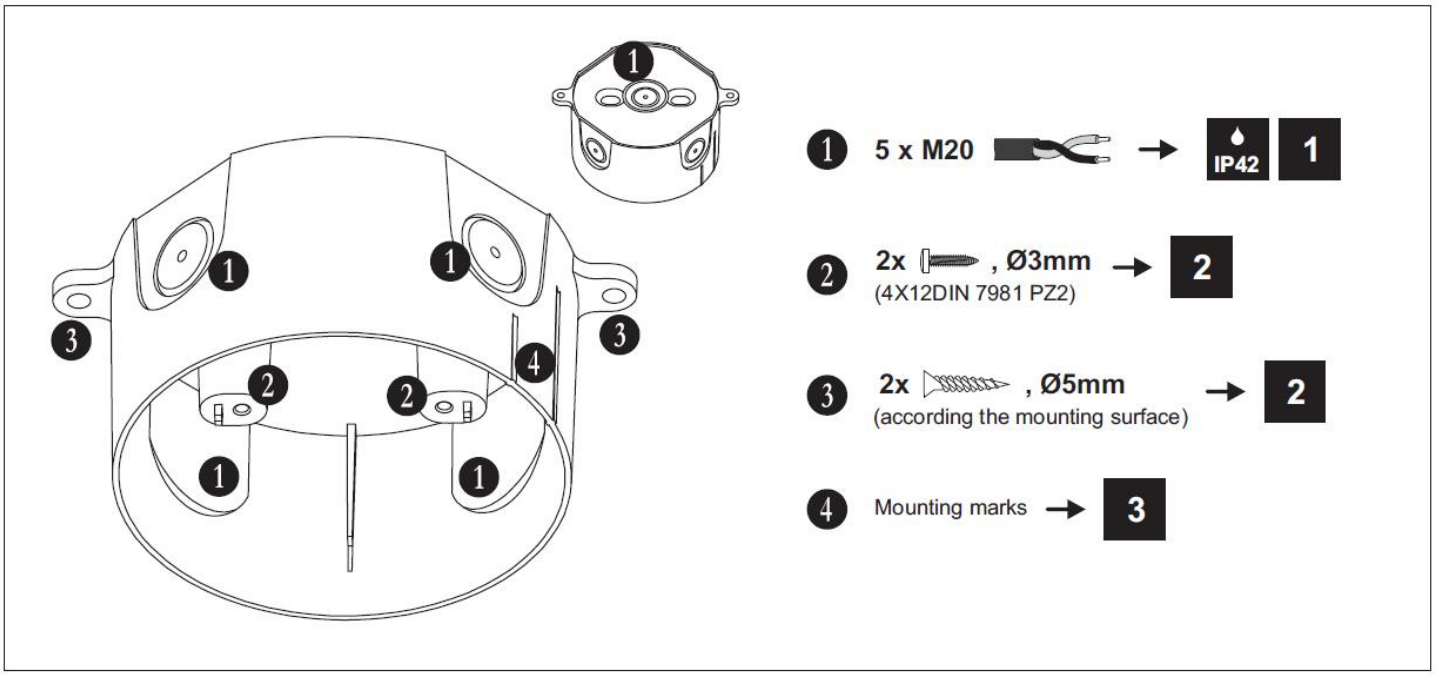

Schneider Electric Buildings AB
Mobilvägen 8
223 62 Lund
Sweden
se.com/contact

© 2022-2023 Schneider Electric.
All rights reserved.

18021362, RevA, 09/2023

1

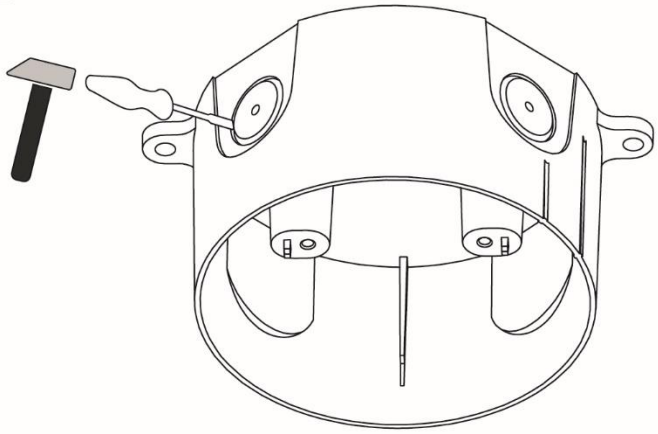

Surface Mounting

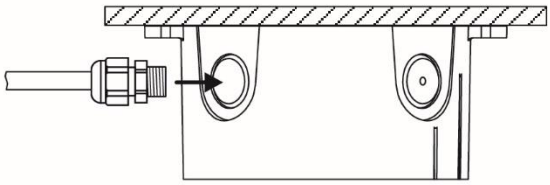

Pendant Mounting

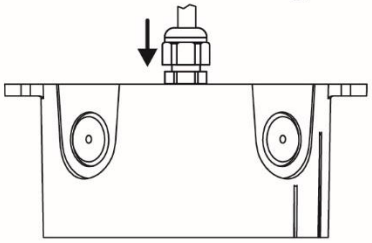

2

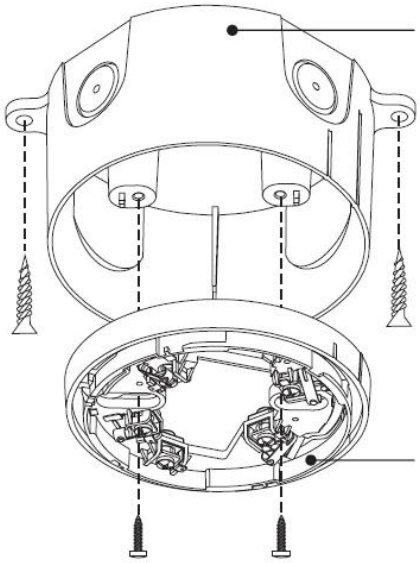

3

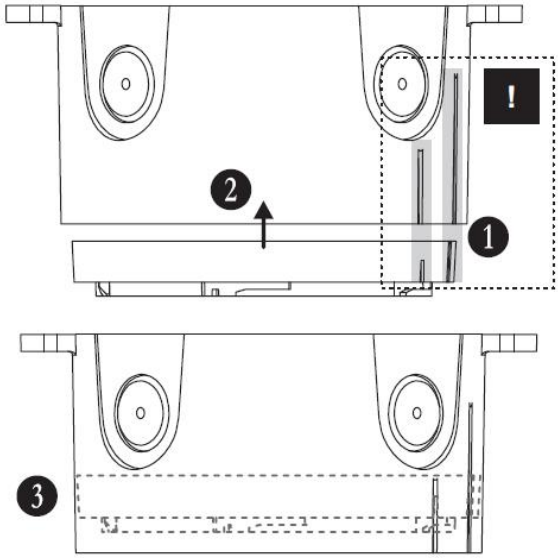

4

Esmi Impresia Standard Base (FFS06741018)

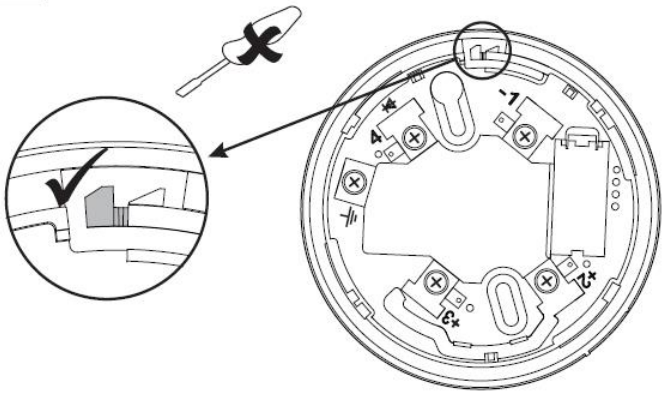

Schneider Electric Buildings AB
Mobilvägen 8
223 62 Lund
Sweden
se.com/contact

© 2022-2023 Schneider Electric.
All rights reserved.

18021362, RevA, 09/2023