


ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

UKK, KK400 split Concrete block, insulated
Lammin Betoni Oy

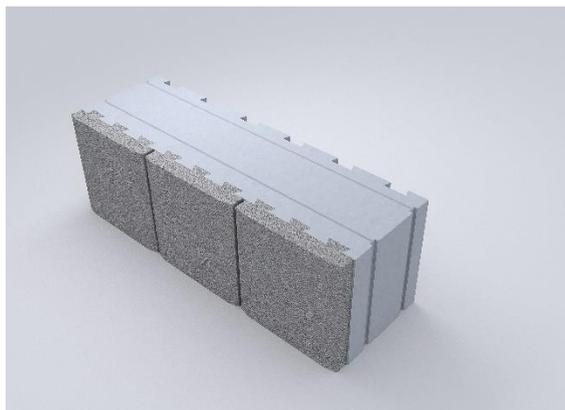

EPD HUB, HUB-0017

Publishing date 29 Mar. 2022, last updated date 29 Mar. 2022, valid until 29 Mar. 2027

GENERAL INFORMATION

MANUFACTURER

| | |
|-----------------|---------------------------------------|
| Manufacturer | Lammin Betoni Oy |
| Address | Paarmamäentie 8, 16900 Lammi, Finland |
| Contact details | info@lammi.fi |
| Website | www.lammi.fi |

EPD STANDARDS, SCOPE AND VERIFICATION

| | |
|--------------------|---|
| Program operator | EPD Hub, hub@epdhub.com |
| Reference standard | EN 15804+A2:2019 and ISO 14025 |
| PCR | EPD Hub Core PCR version 1.0 (1 FEB 2022) EN 16757 Product Category Rules for concrete and concrete elements |
| Sector | Construction product |
| Category of EPD | Third-party verified EPD |
| Scope of the EPD | Cradle to gate with options, A4-A5, and modules C1-C4 and D |
| EPD author | Vahanen Environment Oy Riikka Anttonen, Laura Sariola |
| EPD verification | Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification |
| EPD verifier | Elma Avdyli, EPD Hub |

The manufacturer has sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

| | |
|-----------------------------------|--|
| Product name | UKK, KK400 split Concrete block, insulated |
| Place of production | Finland |
| Period for data | 2020 |
| Averaging in EPD | Multiple products |
| Variation in GWP-fossil for A1-A3 | 0 % |

ENVIRONMENTAL DATA SUMMARY

| | |
|--|------------------|
| Declared unit | 1 m ² |
| Declared unit mass (kg) | 78,1 |
| GWP-fossil, A1-A3 (kgCO ₂ e) | 21,8 |
| GWP-total, A1-A3 (kgCO ₂ e) | 19,2 |
| GWP-total, A1-A3 (kgCO ₂ e) per kg of product | 0,246 |
| Secondary material, inputs (%) | 0,0171 |
| Secondary material, outputs (%) | 76,6 |
| Total energy use, A1-A3 (kWh) | 81,2 |
| Total water use, A1-A3 (m ³ e) | 0,269 |

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Lammin Betoni is a family-owned concrete construction company founded in 1956. Product innovations have shaped the industry over the decades and made Lammi a pioneer in concrete construction. Today, Lammi is a viable market leader in the industry, producing top-quality block and foundation products to create ambitious and individual concrete houses. The company has production facilities in Lammi, Van, and Dabrowa Gornicza, Poland. Lammi's customers are both construction professionals and private customers in the market for single-family houses.

PRODUCT DESCRIPTION

Insulated concrete blocks are intended for use in construction sites where wall strength, tightness, and good thermal insulation are of priority. The products are made of pure concrete by vibratory compression and supplemented with graphite EPS-insulation. Products are ideally suited for challenging structures with high strength requirements, such as apartment or industrial buildings and high underground structures. The product has an innovative outer surface designed to facilitate plastering. The main raw materials for insulated concrete blocks are expanded polystyrene (EPS), portland cement, water, and aggregates such as sand and gravel. Other raw materials account for less than 1 %.

The products UKK and KK400 split are identical except for the grooving on the back of the UKK product. Therefore, the values used in the life cycle calculations are the same for both products.

Emission values for a polyurethane-based adhesive used in the installation are given as additional information (APPENDIX 1).

Further information available at www.lammi.fi

PRODUCT RAW MATERIAL MAIN COMPOSITION

| Raw material category | Amount, mass- % | Material origin |
|-----------------------|-----------------|-----------------|
| Metals | - | - |
| Minerals | 95,9 | - |
| Fossil materials | 4,1 | - |
| Bio-based materials | - | - |

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate.

| | |
|--|-----|
| Biogenic carbon content in the product, kg C | - |
| Biogenic carbon content in packaging, kg C | 0,9 |

FUNCTIONAL UNIT AND SERVICE LIFE

| | |
|-------------------------------|----------------|
| Declared unit | m ² |
| Mass per declared unit, kg | 78,1 |
| Functional unit | - |
| Reference service life, years | 100 |

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

| Product stage | | | Assembly stage | | Use stage | | | | | | | End of life stage | | | | Beyond the system boundaries | | |
|---------------|-----------|---------------|----------------|----------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|------------------------------|----------|-----------|
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D | | |
| x | x | x | x | x | MND | MND | MND | MND | MND | MND | MND | x | x | x | x | x | | |
| Raw materials | Transport | Manufacturing | Transport | Assembly | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstr./demol. | Transport | Waste processing | Disposal | Reuse | Recovery | Recycling |

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines and waste handling formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The products are made of aggregate (sand), cement and water. In addition, EPS insulation is attached to the concrete shells. Blocks are made of earth-moist concrete. The raw materials are manufactured in Finland and Latvia. Raw material losses during production are assessed as insignificant (<0,01%). The raw materials from Latvia (cement) are transported by trucks and container ships. For raw material transports (A2) an occupancy

rate of 100% is assumed for sea freight and 50% for road haulage. Road transports are assumed to be covered by > 32 t truck.

In the manufacturing process, the aggregate is delivered to the silos from which it is dispensed on a conveyor and weighed using a balance. Cement is added to the ingredients and the material is mixed dry. After this water and additives are added and the mass is mixed wet. The mass is then filled into block moulds with EPS insulation and vibrated to the shape and density. After this, blocks are transported on a conveyor belt to the dryer where the product acquires its final shape and density. Dried blocks are packed in plastic on wooden pallets after which they are stored ready for transport. The quality of the production process and materials is constantly monitored.

Manufacturing requires energy for electricity and heating of production facilities (A3). Steel moulds, machinery and equipment are counted as capital goods and are not taken into consideration in the calculation. Waste generated at the production facility is recycled. According to the estimate by the manufacturer, 15% of the wooden pallets are reused.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurring from the final product's delivery to the construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions. Product is transported to the construction site with > 32 t lorry. The average distance from the production facility to a construction site in the Uusimaa region is assumed to be 140 km. Possibly empty return trips are taken into consideration by using an occupancy rate of 50%. Transportation losses are assessed as insignificant.

Products are stacked using PUR-based foam for fixing. The amount of loss in installation is estimated to be negligible (<0,1%). The products are stacked manually and the energy consumption of moving them from the truck platform to the site is assumed to be so low that it has not been considered. As the location of construction sites varies, the transportation to treatment – scenario for installation waste (wooden pallets and plastics) is based on the information provided for the production waste. (A5)

PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)


At the end of the life cycle, the blocks are dismantled. According to the assumption, 80% of the concrete waste is recycled and 20% disposed to landfills. EPS insulation is landfilled. This waste handling scenario used in modules C and benefit in module D is a conservative assumption based on the current practice in Finland and the assessment of the concrete recycling rate by the Finnish Environment Institute (Sederholm, 2019).

The impacts cover dismantling of the building, disassembling of parts and the use of energy for on-site transport. The calculation assumes the use of diesel-powered work machines. The energy consumption (0.107 MJ / kg) for the demolition phase (C1) has been based on VTT's estimate of the demolition energy of a concrete building. The estimate is declared in the background report on the environmental impact of building materials (Rakennusmateriaalien ympäristövaikutukset –Taustaraportti, VTT, 2013).

The dismantled waste material is transported to the closest facility for recycling or final disposal (C2). The assumption for an average distance and transport method is estimated to be 20 km by truck (C2). At the treatment

plant, the recoverable waste is separated for reuse, recycling or energy recovery and directed to further use (C3). Non-recoverable waste is disposed of in landfills (C4). Recoverable concrete waste can be used to replace virgin gravel in soil construction. (D).

MANUFACTURING PROCESS

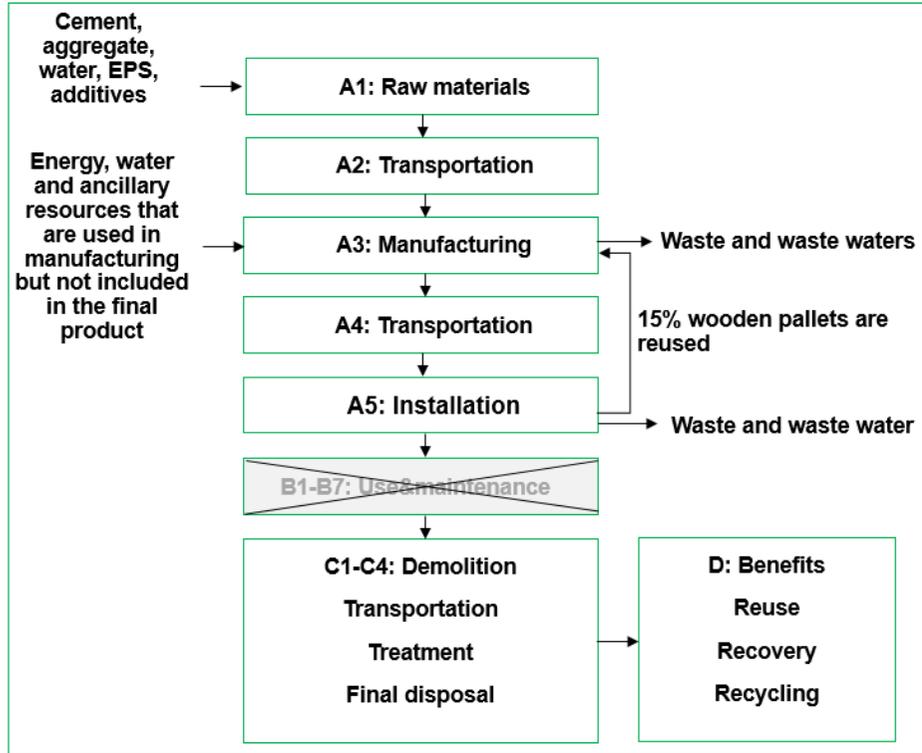

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major materials and energy consumption. All inputs and outputs of the unit processes, for which data is available, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production and maintenance of capital equipment, construction activities and infrastructure as well as activities related to sales or personnel (commuting etc.) are excluded.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. In this study, as per the reference standard, allocation is conducted in the following order;

1. Allocation should be avoided.

2. Allocation should be based on physical properties (e.g., mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

Data on energy, packaging and waste related to production has been delivered per total output. Allocation of these flows per studied product is based on annual production. Data on raw material consumption is product-specific, so no allocation was required concerning it.

Allocation used in environmental data sources is aligned with the above. Module-specific estimations and assumptions are presented in the module descriptions.

AVERAGES AND VARIABILITY

The products UKK and KK400 split are identical except for the grooving on the back of the UKK product. Grooving does not make a measurable difference to products' emissions, so the values used in the life cycle calculations are the same for both products.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using a One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent and One Click LCA databases were used as sources of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|-----------------------------|------------------------|---------|---------|---------|---------|---------|----------|-----|-----|-----|-----|-----|-----|-----|---------|---------|---------|---------|----------|
| GWP – total | kg CO _{2e} | 1,98E1 | 1,18E0 | -1,82E0 | 1,92E1 | 1,99E0 | 4,93E0 | MND | 7,69E-1 | 5,21E-1 | 3,35E-1 | 9,66E-2 | 8,28E-2 |
| GWP – fossil | kg CO _{2e} | 1,97E1 | 1,18E0 | 9,98E-1 | 2,18E1 | 2,01E0 | 1,16E-1 | MND | 7,69E-1 | 5,21E-1 | 3,35E-1 | 9,64E-2 | 8,42E-2 |
| GWP – biogenic | kg CO _{2e} | 1,72E-1 | 8,07E-4 | -2,83E0 | -2,65E0 | 1,46E-3 | 4,81E0 | MND | 2,14E-4 | 2,78E-4 | 9,32E-5 | 1,91E-4 | -1,06E-3 |
| GWP – LULUC | kg CO _{2e} | 3,1E-3 | 3,73E-4 | 6,33E-3 | 9,8E-3 | 6,05E-4 | 5,57E-6 | MND | 6,5E-5 | 1,85E-4 | 2,83E-5 | 2,86E-5 | -2,63E-4 |
| Ozone depletion pot. | kg CFC _{-11e} | 6,73E-7 | 2,75E-7 | 1,99E-7 | 1,15E-6 | 4,73E-7 | 2,73E-9 | MND | 1,66E-7 | 1,18E-7 | 7,24E-8 | 3,97E-8 | 4,73E-8 |
| Acidification potential | mol H ⁺ e | 5,38E-2 | 6,28E-3 | 5,98E-3 | 6,6E-2 | 8,44E-3 | 2,24E-4 | MND | 8,04E-3 | 2,13E-3 | 3,5E-3 | 9,15E-4 | 1,69E-3 |
| EP-freshwater ³⁾ | kg Pe | 5,1E-4 | 9,42E-6 | 5,03E-5 | 5,69E-4 | 1,64E-5 | 2,83E-7 | MND | 3,11E-6 | 4,36E-6 | 1,36E-6 | 1,16E-6 | -8,07E-6 |
| EP-marine | kg Ne | 1,43E-2 | 1,81E-3 | 1,24E-3 | 1,73E-2 | 2,54E-3 | 1,02E-4 | MND | 3,55E-3 | 6,32E-4 | 1,55E-3 | 3,15E-4 | 1,03E-3 |
| EP-terrestrial | mol Ne | 1,52E-1 | 2E-2 | 1,42E-2 | 1,86E-1 | 2,81E-2 | 1,08E-3 | MND | 3,9E-2 | 6,98E-3 | 1,7E-2 | 3,47E-3 | 1,1E-2 |
| POCP (“smog”) | kg NMVOCe | 4,45E-2 | 6,17E-3 | 5,18E-3 | 5,59E-2 | 9,04E-3 | 2,71E-4 | MND | 1,07E-2 | 2,14E-3 | 4,67E-3 | 1,01E-3 | 3,01E-3 |
| ADP-minerals & metals | kg Sbe | 6,82E-5 | 1,97E-5 | 1,12E-5 | 9,91E-5 | 3,43E-5 | 3,89E-7 | MND | 1,17E-6 | 1,41E-5 | 5,12E-7 | 8,81E-7 | -1,2E-5 |
| ADP-fossil resources | MJ | 3,6E2 | 1,82E1 | 2,93E1 | 4,08E2 | 3,13E1 | 2,38E-1 | MND | 1,06E1 | 7,85E0 | 4,61E0 | 2,69E0 | 1,49E0 |
| Water use ²⁾ | m ³ e depr. | 6,41E0 | 6,67E-2 | 3,53E-1 | 6,83E0 | 1,16E-1 | -7,53E-3 | MND | 1,97E-2 | 2,53E-2 | 8,6E-3 | 1,25E-1 | -3,68E0 |

1) GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential. 2) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator. 3) Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e.

USE OF NATURAL RESOURCES

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--------------------------|----------------|---------|---------|---------|---------|---------|---------|-----|-----|-----|-----|-----|-----|-----|---------|---------|---------|---------|----------|
| Renew. PER as energy | MJ | 4,36E1 | 2,26E-1 | 1,14E1 | 5,52E1 | 3,94E-1 | 5E-3 | MND | 5,73E-2 | 1,11E-1 | 2,49E-2 | 2,18E-2 | -1,92E-1 |
| Renew. PER as material | MJ | 0E0 | 0E0 | 2,82E1 | 2,82E1 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |
| Total use of renew. PER | MJ | 4,36E1 | 2,26E-1 | 3,96E1 | 8,34E1 | 3,94E-1 | 5E-3 | MND | 5,73E-2 | 1,11E-1 | 2,49E-2 | 2,18E-2 | -1,92E-1 |
| Non-re. PER as energy | MJ | 1,91E2 | 1,82E1 | 2,74E1 | 2,37E2 | 3,13E1 | 2,38E-1 | MND | 1,06E1 | 7,85E0 | 4,61E0 | 2,69E0 | 1,49E0 |
| Non-re. PER as material | MJ | 1,69E2 | 0E0 | 1,91E0 | 1,71E2 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |
| Total use of non-re. PER | MJ | 3,6E2 | 1,82E1 | 2,93E1 | 4,08E2 | 3,13E1 | 2,38E-1 | MND | 1,06E1 | 7,85E0 | 4,61E0 | 2,69E0 | 1,49E0 |
| Secondary materials | kg | 1,27E-2 | 0E0 | 6,37E-4 | 1,34E-2 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |
| Renew. secondary fuels | MJ | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |
| Non-ren. secondary fuels | MJ | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |
| Use of net fresh water | m ³ | 2,58E-1 | 3,72E-3 | 7,31E-3 | 2,69E-1 | 6,51E-3 | 4,53E-4 | MND | 9,35E-4 | 1,34E-3 | 4,07E-4 | 2,95E-3 | -8,41E-2 |

6) PER = Primary energy resources

END OF LIFE – WASTE

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|---------------------|------|---------|---------|---------|---------|---------|---------|-----|-----|-----|-----|-----|-----|-----|---------|---------|-----|---------|----------|
| Hazardous waste | kg | 3,2E-1 | 1,78E-2 | 7,02E-2 | 4,08E-1 | 3,04E-2 | 7,38E-3 | MND | 1,14E-2 | 7,97E-3 | 0E0 | 2,51E-3 | -1,26E-2 |
| Non-hazardous waste | kg | 6,12E0 | 1,9E0 | 1,8E0 | 9,82E0 | 3,36E0 | 1,14E0 | MND | 1,22E-1 | 5,47E-1 | 0E0 | 1,83E1 | -3,79E-1 |
| Radioactive waste | kg | 2,89E-4 | 1,25E-4 | 1,99E-4 | 6,14E-4 | 2,15E-4 | 9,08E-7 | MND | 7,41E-5 | 5,38E-5 | 0E0 | 1,78E-5 | 1,9E-5 |

END OF LIFE – OUTPUT FLOWS

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--------------------------|------|-----|-----|--------|--------|-----|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------|-----|-----|
| Components for re-use | kg | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |
| Materials for recycling | kg | 0E0 | 0E0 | 5,6E-2 | 5,6E-2 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 5,98E1 | 0E0 | 0E0 |
| Materials for energy rec | kg | 0E0 | 0E0 | 9E-2 | 9E-2 | 0E0 | 2,28E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |
| Exported energy | MJ | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 | MND | 0E0 | 0E0 | 0E0 | 0E0 | 0E0 |

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|----------------------|------------------------------------|---------|---------|---------|---------|---------|---------|-----|-----|-----|-----|-----|-----|-----|---------|---------|---------|---------|----------|
| Global Warming Pot. | kg CO ₂ e | 1,91E1 | 1,17E0 | 9,69E-1 | 2,12E1 | 1,99E0 | 1,16E-1 | MND | 7,63E-1 | 5,16E-1 | 3,33E-1 | 9,46E-2 | 8,81E-2 |
| Ozone depletion Pot. | kg CFC ₁₁ e | 5,67E-7 | 2,19E-7 | 1,93E-7 | 9,79E-7 | 3,76E-7 | 2,29E-9 | MND | 1,31E-7 | 9,41E-8 | 5,73E-8 | 3,14E-8 | 3,63E-8 |
| Acidification | kg SO ₂ e | 4,12E-2 | 3,53E-3 | 4,68E-3 | 4,94E-2 | 4,09E-3 | 1,52E-4 | MND | 1,14E-3 | 1,04E-3 | 4,95E-4 | 3,81E-4 | -4,16E-4 |
| Eutrophication | kg PO ₄ ³ e | 1,01E-2 | 6,01E-4 | 1,58E-3 | 1,23E-2 | 8,26E-4 | 1,53E-4 | MND | 2E-4 | 2,15E-4 | 8,71E-5 | 7,38E-5 | -2,54E-4 |
| POCP ("smog") | kg C ₂ H ₄ e | 4,1E-3 | 1,78E-4 | 3,52E-4 | 4,63E-3 | 2,59E-4 | 3,64E-6 | MND | 1,17E-4 | 6,87E-5 | 5,09E-5 | 2,8E-5 | -3,43E-5 |
| ADP-elements | kg Sbe | 6,82E-5 | 1,97E-5 | 1,12E-5 | 9,91E-5 | 3,43E-5 | 3,89E-7 | MND | 1,17E-6 | 1,41E-5 | 5,12E-7 | 8,81E-7 | -1,2E-5 |
| ADP-fossil | MJ | 3,6E2 | 1,82E1 | 2,93E1 | 4,08E2 | 3,13E1 | 2,38E-1 | MND | 1,06E1 | 7,85E0 | 4,61E0 | 2,69E0 | 1,49E0 |

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliance with the reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? Read more online
This EPD has been generated by the One Click LCA EPD generator, which has been verified and approved by the ED Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as a present concerning the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or the development of the declaration and have no conflicts of interest regarding this verification.

Elma Avdyli, approved verifier by EPD Hub, 29.03.2022



APPENDIX 1:

Emission value in modules A1-A3

The GWP total value of the insulated concrete block UKK and KK400 split is 18,8 kg CO₂ eq / m² and 94,0 kg CO₂ eq / m³ for modules A1-A3.

Adhesive

On site blocks were installed using polyurethane-based adhesive. The average need for adhesive for m² and m³ of insulated concrete blocks UKK and KK400 split, and the corresponding average greenhouse gas emissions (based on CO₂data.fi), are as follows:

| | |
|---------------------------------|--|
| Adhesive | 150 ml/m ² 788 ml/m ³ |
| Adhesive, GHG –emissions | 0,02 kg CO ₂ eq. /m ² 0,08 kg CO ₂ eq. /m ³ |

Carbonation of concrete

| | |
|--|-----|
| The CO₂ uptake in kg per m² | 0,4 |
|--|-----|

The carbonation of the product has been assessed based on the assumption that the structure will be outdoor and sheltered from the rain.

Service life is assumed to be 100 years. The maximum theoretical uptake for Portland cement is 0,49 kg CO₂/kg cement.