


HUOPA PET

by AAVA



www.akustiikkapalvelut.fi
info@akustiikkapalvelut.fi

SOLID

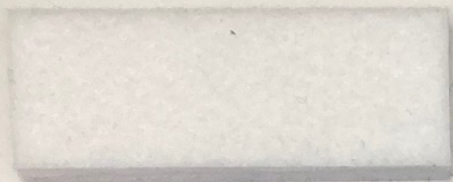

401



494



499



450



456



446



432



424



426



438



409



478

MELANGE




400ML



401ML



494ML

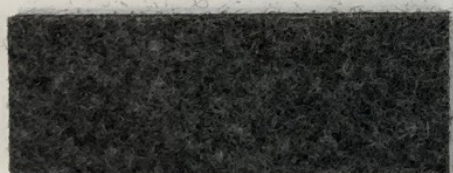

496ML



450ML



446ML



432ML



424ML



423ML



426ML



438ML



409ML

Weight
Thickness

200 gr/m²
1,75 mm



50 lm (length)
200 cm (width)

Weight
Thickness

500 gr/m²
3 mm



20 lm (length)
200 cm (width)

Weight
Thickness

800 gr/m²
5 mm



15 lm (length)
200 cm (width)



Recyclable
100% Polyester



Flame Retardancy
EN 13501-1+A1: B-s1, d0
ASTM E-84-18: Class A



Sound Absorption
UNE-EN ISO 354: $\alpha_W = 0,15$ (H)
EN ISO 11654: Class E



Colour fastness to light
EN ISO 105-B02: 5-7



Abrasion Resistance
UNE-EN 14465+A1: Class A
ISO 12947-2 / AC: > 50.000 Rubs



Colours & Thicknesses
Solid and melange colours
3 thicknesses: 1,75 mm - 3 mm - 5 mm

