



## Universal dry floor preparation system

- Dry levelling
- Non-flammable
- High compressive strength
- Fast track installation
- Suitable for heavy use
- For renovation purposes
- Almost completely impervious to moisture

The Jumpax® CP (Cement bounded Panel) dry levelling system is developed as a universal fast track floor preparation system for application as a dry screed. It is used over various structural substrates, such as cement bonded floors and timber framing. Because of its extreme log TOG of just 0.4 it is most suitable to be used over all types of floor heating and/or cooling systems. Jumpax® CP is made out of non-flammable materials.

Jumpax® CP is most suitable to be used under many finished floor coverings, including ceramic tiles, sheet vinyl, luxury vinyl tiles, cork, linoleum and rubber (beforehand level out with fibre-strengthened feather finish).


Jumpax® CP is highly resistant to mechanical damage and is almost completely impervious to moisture. This quality makes it ideal for application in final-phase construction where there is weather exposure.

For acoustic purposes, Jumpax® CP is combined with Cocolfloor Basic®, our acoustic moisture proof sub layer. According to EN-ISO 140-8 / 717-2, this combination achieves a fantastic impact sound reduction of 23 dB  $\Delta L_w$ , measured on a standard concrete floor. In order to simulate normal circumstances, the test floor was even weighted with an extra 23 kg per m<sup>2</sup>.

\* In a floating screed situation, the noise reduction of the composed top floor always depends on the impact noise reduction of floating screed system in place.

**Fast track floor preparation means no time lost!**

**uniFloor**  
UNDERLAY SYSTEMS BV

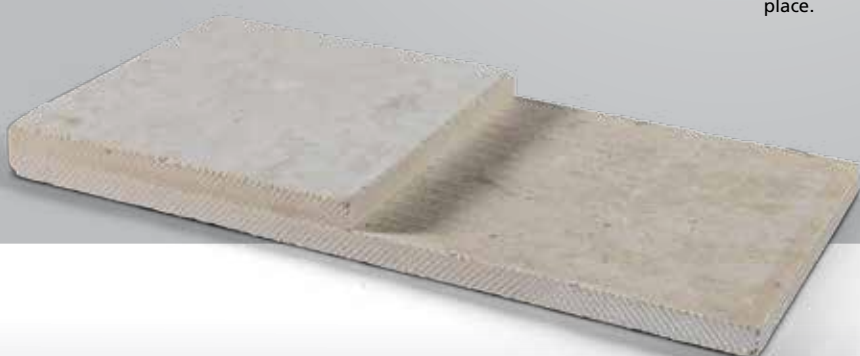

# Products specifications



## Technical data

Article number	152.000
Thickness (mm)	12 +/- 0,2
Dimensioning (mm)	1200 x 600 +/- 3
Materials	Cement, Silica (quartz), Cellulose and filling material
Weight per panel (kg)	7,5
Weight per m <sup>2</sup> single panel (kg)	10,5
Weight per m <sup>2</sup> (kg)	21
Colour	Grey
Impact sound reduction, combined with Cocofloor Basic® 8 mm according to EN-ISO 140-8 / 717-2	23 dB $\Delta L_w$
Fire class EN 13501: 2007	B <sub>fl-s1</sub>
Fire Resistance in accordance to BS476 Part 22, 1987 (min)	68 minutes (6mm board)
R <sub>m</sub> value (m <sup>2</sup> K/W)	0,038
TOG	0,4
Heat conduction coefficient $\lambda$ (W.m <sup>-1</sup> .K <sup>-1</sup> )	0,345

## Packaging

Installation instructions	Present
Package contents	2x 25 base- and 25 topboards
Pallet contents	100 panels / 36 m <sup>2</sup>
Pallet size (lxbxh mm)	1200 x 1200 x 500
Pallet weight	750 kg

## Application

Universal fast track screed replacement system.

## Package contents

# 50/50

- 50 base- and 50 topboards
- 1200 x 1200 mm
- 36 m<sup>2</sup>

**Thickness 12 mm**



Scan the QR-Code for  
the installation manual  
of Jumpax® CP!



[facebook.com/jumpax24](https://facebook.com/jumpax24)



[youtube.com/  
watch?v=lawZNY7l\\_ig](https://youtube.com/watch?v=lawZNY7l_ig)



**UK Toll Free Number**  
T 0845 603 0 906